

LARX TOUCH thermostat

DESCRIPTION AND KEY FEATURES

- › Modern touch control
- › Clear and backlit display
- › Programmable weekly mode
- › Possibility of setting different temperatures at different times
- › Manual and automatic mode
- › Suitable for electric floor heating
- › Mounting in an installation box (standard size)
- › Simple and intuitive control



TECHNICAL DESCRIPTION

Technical parameters of LARX TOUCH thermostat


Product marking	LARX-TERM-TOUCH
Voltage	230 V AC 50/60 Hz
Maximum load	16 A / 3600 W
Regulation type	floor / space / combined
Temperature setting range	5–45 °C
Display	touch, backlit LCD
Protection	IP21
Installation	installation box Ø 68 mm
Floor sensor	NTC 10 kΩ at 25 °C
Dimensions	86 × 86 × 40 mm (w × h × d)

USAGE

- › Temperature control of electric floor heating
- › Households, apartments, commercial premises
- › Suitable for renovations and new buildings

WIRING DIAGRAM AND BASIC CONTROLS

Thermostat terminal wiring diagram

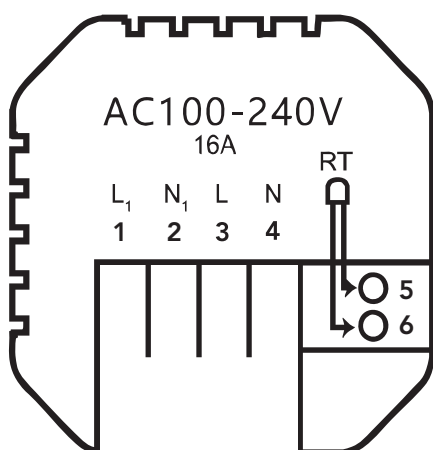

- | | |
|-----|--------------------------|
| 1+2 | Load |
| 3 | Line L |
| 4 | Neutral N |
| 5+6 | Floor temperature sensor |



SAFETY INSTRUCTIONS

Installation must be realized by a qualified person in accordance with applicable regulations. Disconnect the device from the Voltage before installation. The thermostat is intended for indoor use only. Do not handle the device in a wet environment.

Technical questions

Bc. Ondřej Levý

+420 725 140 142 | levy@carbon-film.com